


WALTHER FLENDER TRANSPORT TIMING BELTS- PU-60° FILM

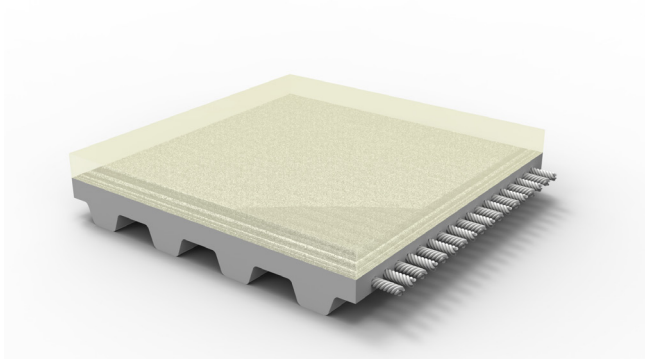


Characteristics

Material	Polyurethane
Colour	Transparent
Shore A /Density RG	60°A
Coefficient of static friction dry	1,33
M-factor deflection	25
Temperature resistance [° C]	- 20°C / +80°C
Resistance	Against simple oils and greases, petrol, ozone
Editing option	Contour grinding and milling as well as surface grinding possible
Typical field of application	<ul style="list-style-type: none"> • Packaging technology • glass processing, • High abrasion protection

Dimensions

Profile/ Pitch	Pitch t [mm]	Tooth height h _t [mm]	Web height W [mm]	Standard thickness [mm]	Total height h [mm]
T10	10	2,50	2,00	2,00	6,50
HY 8M	8	3,38	2,22	2,00	7,60

T-Profile - geometry data based on ISO 17396

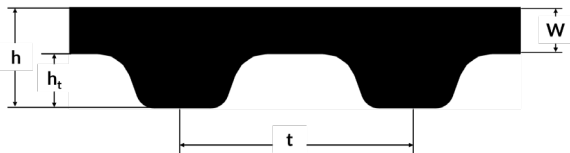

HY-Profil - Geometry data based on ISO ISO 13050 [Profile system H]

