


WALTHER FLENDER HYBRID LL TIMING BELTS (OPEN LENGTH)

Design & Features



Supported by:

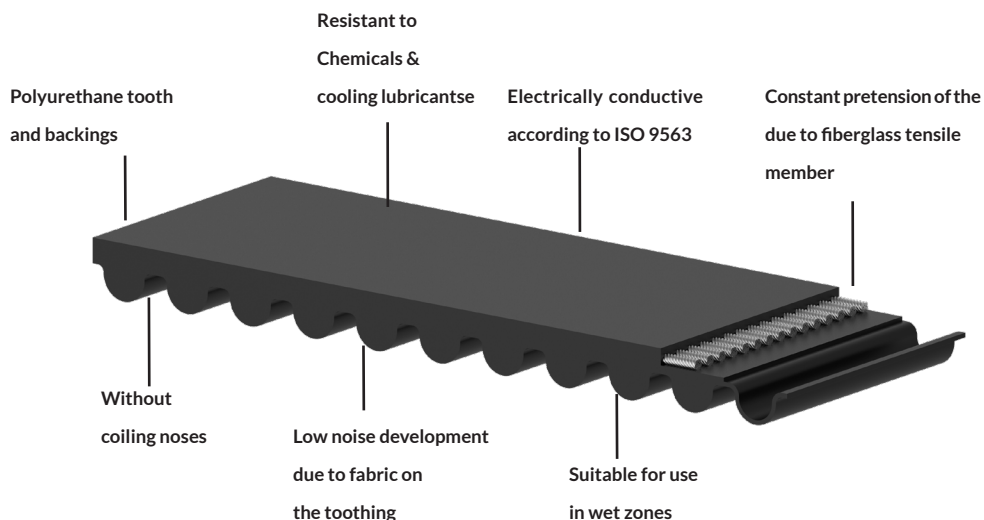

on the basis of a decision by the German Bundestag




Dimensions

Pitch t [mm]	Total height h [mm]	Tooth height h_t [mm]	Weight per metre (glass cord) g/25 mm belt width
8	5,60	3,38	120


Characteristics

Electrically conductive according to ISO 9563	yes
Temperature resistance [° C]	-10 / +50
Hardness [° Shore A]	89 +/-4

Other geometry data based on ISO 13050 [Profile system H]

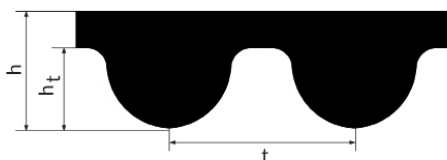

Made in the advantageous spiral cut process



For further information, please contact our application technology under phone number +49 211 7007-00 or by mail to info@walther-flender.de

You are also welcome to contact us about:

