


WALTHER FLENDER TRANSPORT TIMING BELTS- PVC-WHITE

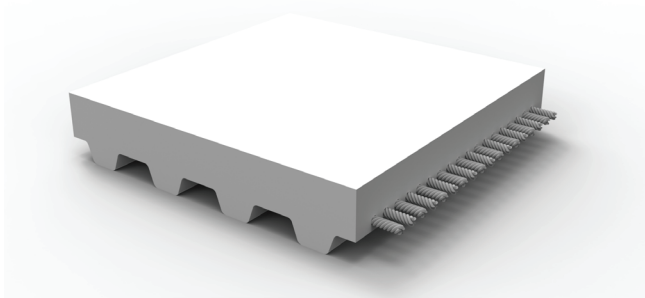


Characteristics

Material	Polyvinyl chloride
Colour	White
Shore A /Density RG	65°A
Coefficient of static friction dry	0.89
M-factor deflection	25
Temperature resistance [° C]	- 10°C / +110°C
Resistance	Limited resistance to solvents, oils and grease, resistant to acids and bases
Editing option	Not possible
Typical field of application	<ul style="list-style-type: none"> • Food industry • Confectionery industry • Paper industry • Inclined conveying

Dimensions

Profile/ Pitch	Pitch t [mm]	Tooth height h _t [mm]	Web height W [mm]	Standard thickness [mm]	Total height h [mm]
T10	10	2,50	2,00	1,50	6,00
HY 8M	8	3,38	2,22	1,50	7,10

T-Profile - geometry data based on ISO 17396

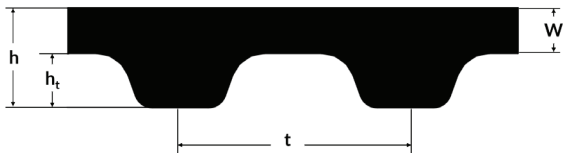

HY-Profil - Geometry data based on ISO ISO 13050 [Profile system H]

