


WALTHER FLENDER TRANSPORT TIMING BELTS- SUPERGRIP WHITE

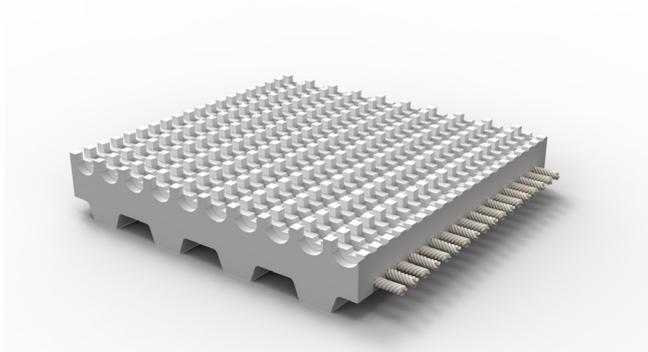


Characteristics

Material	Polyvinyl chloride
Colour	White
Shore A / Density RG	50°A
Coefficient of static friction dry	0,81
M-factor deflection	25
Temperature resistance [° C]	- 15°C / +90°C
Resistance	against oils and greases, as well as against acids and alkalis
Editing option	Not possible
Typical field of application	<ul style="list-style-type: none"> • Cardboard boxes • Inclined transport • non-marking

Dimensions

Profile/ Pitch	Pitch t [mm]	Tooth height h _t [mm]	Web height W [mm]	Standard thickness [mm]	Total height h [mm]
T10	10	2,50	2,00	3,50	8,00
HY 8M	8	3,38	2,22	3,50	9,10

T-Profile - geometry data based on ISO 17396

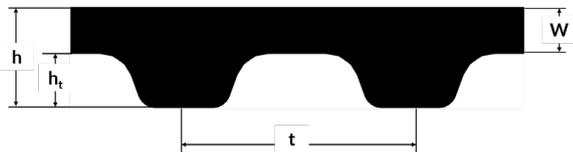

HY-Profil - Geometry data based on ISO ISO 13050 [Profile system H]

